

MK2788 Wide VCC Range HF QR Controller with GaN Integrated

1. Description

The MK2788 is a high frequency QR controller optimized for PD/Fast charge applications. Its wide VCC operating voltage range (9V-85V) allows it to cover PD/PPS from 3.3V-21V output range without the need to use additional VCC windings or linear step-down circuits.


In order to achieve high efficiency from universal line across different load, the MK2788 is self-adaptive to operate at DCM/QR. At light load, it will work in Burst mode to improve efficiency.

The MK2788 offers comprehensive protection features including output over-voltage protection (OVP), output over power protection (OPP), VCC over-voltage protection, Brown in/out, Secondary side SR short circuit protection, and CS short protection.

2. Typical Applications

- AC/DC PD/Adapter
- High Power Density Power Supply

4. Simplified Application

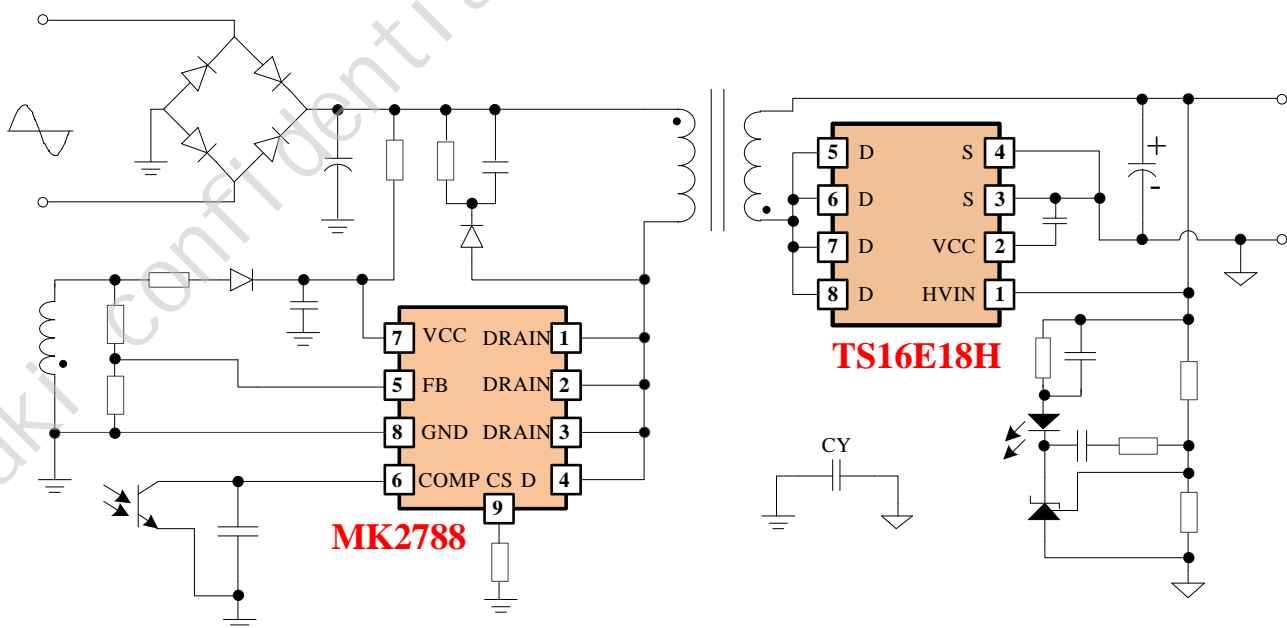


3. Features

- Built-in 700V 365mR GaN FET
- Wide VCC Operating Range(9V-85V)
- Working Frequency up to 130kHz
- Proprietary Soft-start Scheme to Achieve Low SR Vds Stress
- Optimized Efficiency-easily Meets Energy Efficiency Standards
- CS Short Protection
- OPP/SSCP Protection
- Brown in /Brown out Function
- VCC OVP/VO OVP Protection
- Support PPS Wide Range Output
- Tiny DFN5X6 Package

5. Ordering Information

Ordering No.	Description
MK2788ADF	DFN5X6, 3000 pcs/reel

6. Package Reference

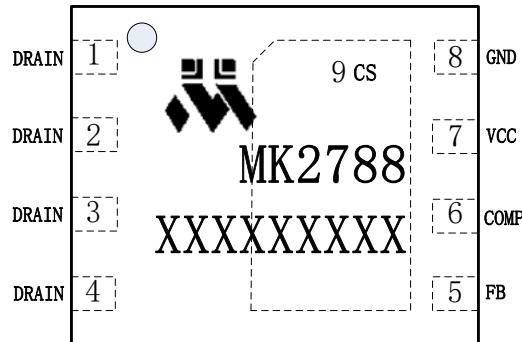

XXXXXXXXXX: Lot Code
DFN5X6 Top View

Absolute Maximum Ratings⁽¹⁾

VCC.....	-0.3V to +100V
COMP, FB.....	-0.3V to +5.5V
CS.....	-0.7V to +5.5V
DRAIN.....	-3V to +700V
I _D	2.8A ⁽²⁾
I _{DM}	11A ⁽³⁾
Junction Temperature	+155°C

Recommended Operation Conditions

VCC	9V to 85V
Maximum Junction Temp. (T _J).....	+125°C

Thermal Resistance⁽⁴⁾

θ _{JA}	50 °C/W
θ _{JC}	2.2 °C/W

Notes:

- (1) Exceeding these ratings may damage the device;
- (2) T_J=125°C, The maximum continuous drain current is calculated based on the maximum allowable junction temperature;
- (3) Pulse≤300us;
- (4) Measured on JESDSD51-7, 4 layers PCB.

7. Pin Functions

Pin #	Name	Description
1、2、3、4	DRAIN	HV Power GaN Drain
5	FB	Auxiliary Voltage Sense
6	COMP	Voltage Feedback
7	VCC	Power Supply
8	GND	Ground
9	CS	Current Sense Input

8. Block Diagram

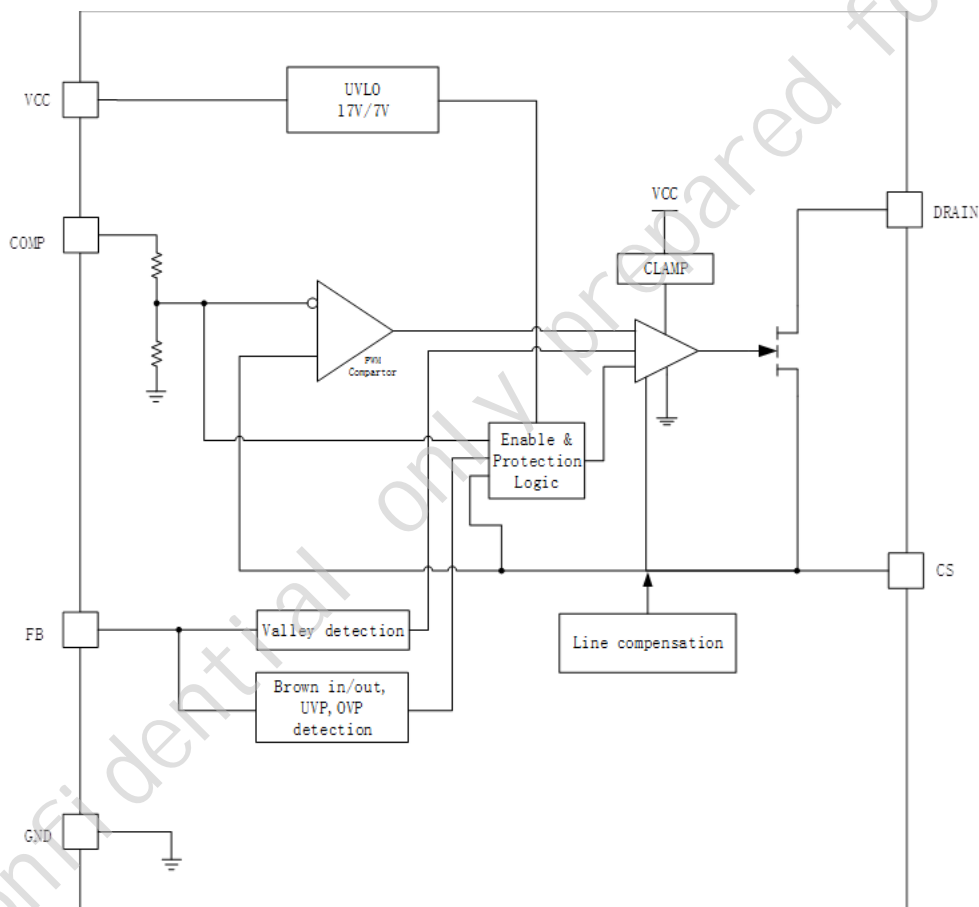


Figure 1. Functional Block Diagram

9. Electrical Characteristics

VCC=12V, T_A=25°C, unless otherwise noted.

Parameter	Symbol	Conditions	Min	Typ	Max	Units
GaN Section						
GaN Drain to Source Breakdown Voltage	B _{VDSS}		700			V
Static Drain to Source on Resistance	R _{DS(on)}			0.365	0.48	Ω
Supply Management Section						
VCC UVLO Rising	V _{CC_ON}		15.5	17.2	19.9	V
VCC UVLO Falling	V _{CC_OFF}		6	7.2	8.4	V
VCC UVLO Hysteresis	V _{CC_HYST}			10		V
VCC Startup Current	I _{STARTUP}		2	5	8	uA
VCC Normal Operating Current	I _{OP}	COMP=2V	0.3	0.45	0.6	mA
Burst Operating Current	I _{BURST}	COMP=0V, GATE=1nF to GND	240	290	340	uA
VCC Hold Threshold	V _{CC_HOLD}		7	8	9.5	V
VCC OVP Threshold	V _{CC_OVP}		88	93	100	V
VCC Clamp Threshold	V _{CC_CLAMP}		89	102	110	V
Comp Input Section						
COMP Open Voltage	V _{COMP_OP}	COMP Pin Open-circuited	4	4.4	4.8	V
COMP Short-circuit Current	I _{COMP_SHORT}	COMP=0V	130	160	190	uA
Burst Mode Entry Voltage	V _{BM_ET}		0.27	0.3	0.33	V
Burst Mode Hysteresis	V _{BM_HY}			0.05		V
OPP Protection Threshold	V _{OPP}		2.8	3.0	3.2	V
OPP Deglitch Time*	T _{D_OPP}			T _{SS} *6		ms
Current Sense Input Section						
Soft Start Time of CS Threshold	T _{SS}		4	7	10	ms
Secondary Rectifier Short-circuit trigger voltage (OC FAULT)	V _{SR_SH}		1.1	1.2	1.3	V
SR Short-circuit Deglitch cycles*				3		cycles
Cycle by Cycle Current Limit	V _{CS_CBC}	V _{FB} <1V, I _{FB} =100uA	0.79	0.85	0.91	V
Cycle by Cycle Current Limit	V _{CS_CBC}	V _{FB} <1V, I _{FB} =300uA	0.56	0.63	0.7	V
CS Short Protection Threshold	V _{CS_SH}			0.05		V
CS Short Deglitch cycles*	T _{CS_SH}			3		cycles

FB Input Section						
Brown-in Detection Threshold	I _{BNI}		78	94	109	uA
Brown-out Detection Threshold	I _{BNO}		69	85	100	uA
Brown-out Deglitch Time*	T _{BL_BNO}			T _{SS} *7		ms
FB OVP Threshold	V _{FB_OVP}		3.3	3.6	3.9	V
FB OVP Deglitch Time*	T _{BL_OVP}			7		
FB UVP Threshold (Output Short)	V _{FB_ST}		0.17	0.2	0.23	V
FB UVP Threshold (Output Short) Deglitch Time*	T _{BL_ST}			7		cycles
UVP Blanking Time after SS*	T _{D_ST}			T _{SS} *2		ms
FB High Threshold	V _{FB_H}		1.7	1.9	2.1	V
FB Middle Threshold	V _{FB_M}		1	1.1	1.2	V
Control Law						
Normal Mode Frequency	F _{SW_max}		110	130	150	kHz
Green Mode Frequency	F _{SW_green}		21	25	29	kHz
Dithering Range*				±6		%
Dithering Period*				8		ms
Maximum Toff Time	T _{off_MAX}		80	110	140	us
Thermal Shutdown Threshold*	Th _{SD}			155		°C
Thermal Shutdown Hysteresis*	Th _{SD_hys}			30		°C

Note:

* Guaranteed by design

10. Operation Descriptions

Vcc and Startup

The MK2788's start-up current is only $I_{STARTUP}$ (~5uA) so a large value of start-up resistor can be used to charge up VCC while minimizing power loss during start-up. Once VCC reaches above the V_{CC_ON} (~17.2V) threshold, the MK2788 starts switching.

Soft Start

The MK2788 features an internal T_{SS} (~7ms) soft-start to reduce electrical stress in the power system during start-up. To further reduce voltage stresses from high peak current and high frequency switching, the MK2788 operates at optimized frequencies and control modes accordingly to output voltages and synchronous rectifier controller start-up status.

Operation Curve

The MK2788 has a variety of working modes, which can be switched by monitoring the voltage change of COMP. The voltage change of COMP is consistent with the direction of load change, so the MK2788 can automatically switch to a better working mode according to different loads. The operation curve of the MK2788 working mode is shown as follows:

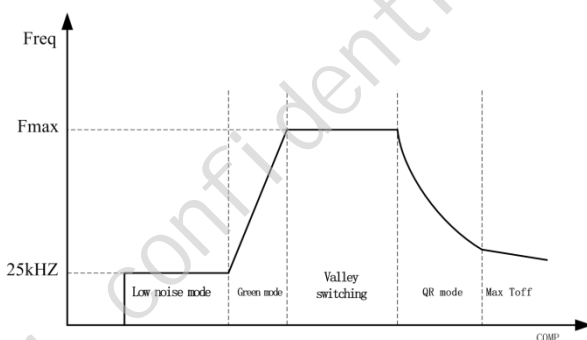


Figure 2:operation curve

Brown in/ Brown out

When the power GaN is turned on, the voltage at auxiliary windings is negative, which makes Brown-in/Brown-out protection feasible. When system starts up, the power GaN is turned on, the

current flowing out of FB pin is equal to:

$$\frac{V_{BULK} * N_a}{R_u * N_p}$$

If this current is larger than I_{BNI} for four switching cycles, the controller starts to soft start. Otherwise Brown-in restart protection is triggered.

During normal operation, when the power GaN is turned on, the current at FB is less than I_{BNO} for at least T_{BL_BNO} (~49ms), the controller enters Brown-out restart protection.

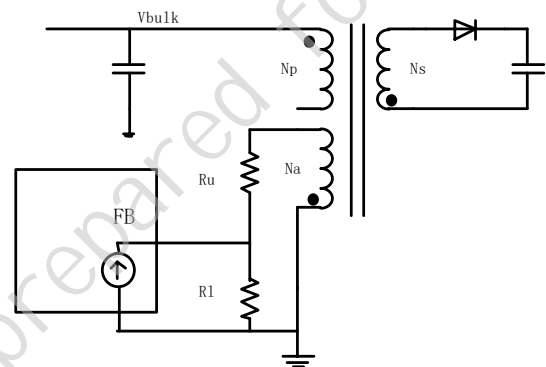


Figure 3:Brown in/Brown out

Current Sense

The MK2788 is current mode PWM controller. The voltage detected on CS pin is compared with the voltage loop feedback voltage inside the chip to determine the duty ratio. When COMP is at its maximum, the MK2788 will also limit the peak current of the primary edge cyclically, and its maximum cycle term current point is V_{CS_CBC}/R_{cs} . Due to the voltage of the drive current on the CS resistance and the influence of the converted capacitor C_{SW} on the drain node, there will be a spike in the CS resistance at the moment when the drive is switched on. If not processed, the duty cycle from the chip will be too small or lead to misprotection. Therefore, the leading edge blanking time ~300nS was added to the CS sampling circuit inside the chip.

Line Compensation

The MK2788 uses the detected input line voltage through the current at FB pin to generate the offset voltage added on internal current signal to compensate the output OPP power level. This mechanism helps achieve flat OPP power level over different input voltage.

Voltage Feedback Loop

COMP is the voltage loop feedback pin which is connected to TL431 output through opto-coupler. In order to support a wide COMP range, a ratio of 1/2.5 resistor divider is used before it goes into PWM comparator.

A ceramic capacitor is suggested to be placed parallel to with the resistor which is series with opto-coupler diode.

FB Voltage Detection

The MK2788 detects the transformer core demagnetization by monitoring the signal at the auxiliary windings through FB pin.

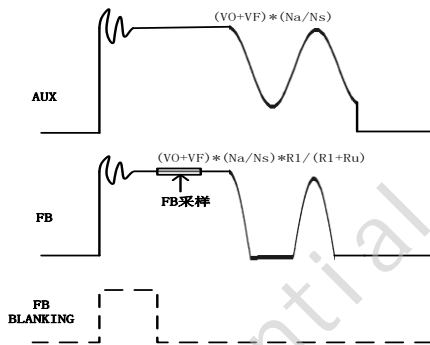


Figure 4:FB detection

In the demagnetization time of the transformer, after a period of demagnetization time ($\sim 1.4\mu s$), the FB sampling voltage is compared with different thresholds. The MK2788 can complete the following functions:

1. Output over voltage protection (OVP): FB is above V_{FB_OVP} ($\sim 3.6V$) for 7 switching cycles;
2. Output under voltage protection (output short circuit protection): FB is below V_{FB_ST} ($\sim 0.2V$) for 7 switching cycles;
3. Based on the detected output voltage, the work control curve is determined.

Valley Switching

After secondary side rectification is complete, the drain voltage starts oscillating with a frequency of approximately $\frac{1}{2} \pi \sqrt{C_{oss} \times L_p}$, where L_p is the inductance of primary winding of the transformer and C_{oss} is capacitance on the drain of primary GaN. When the oscillation ringing is below 0V at the auxiliary winding, the MK2788 clamps the FB pin to 0V, and senses the current at the FB pin. When the current out of FB reaches a design value, a “possible” valley is locked and the MK2788 turns on after propagation delay.

Protection Function

Reliable power supply system is achieved with restart protections including cycle-by-cycle current limit, over-power protection (OPP), output over-voltage protection, etc. Detailed protection features are described in the following sessions. The MK2788 protection triggers, will stop the drive, the VCC discharge current makes the VCC capacitor voltage drop. When the VCC voltage drops to V_{CC_OFF} ($\sim 7.2V$), the VCC capacitor starts charging and reaches V_{CC_ON} ($\sim 17.2V$), restarting the drive and completing the restart.

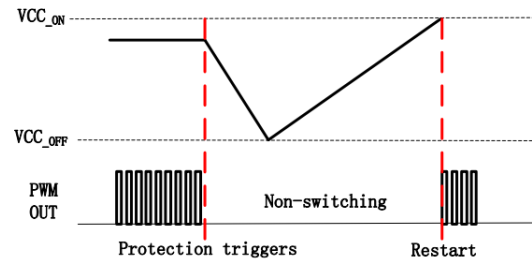


Figure 5:Restart mode

MK2788 PROTECTION FEATURES	MK2788 PROTECTION SCHEMES
OPP	RESTART
VO_OVP	RESTART
VCC_OVP	RESTART
CS_SHORT	RESTART
SSCP	RESTART
FB_UVP (VO_SCP)	RESTART

Over Power Protection

The OPP protection is achieved by monitoring COMP voltage. If COMP voltage is above $V_{OPP}(\sim 3V)$ for at least 6 times of soft-start time, i.e. $T_{ss} \times 6(\sim 42ms)$, the MK2788 enters restart mode.

Cycle by Cycle Current Limiting

The current-mode control chip itself compares the CS signal with the COMP cycle-by-cycle. However when the output is short-circuited or the opto-coupler is open, the COMP voltage may rise very high, resulting in excessive peak current and causing transformer saturation. Therefore, the MK2788 adds another layer of protection, the CS voltage will be compared with V_{CS_CBC} cycle-by-cycle. After the blanking time $\sim 300nS$, as soon as CS reaches V_{CS_CBC} , the chip immediately chop drive.

Secondary Side SR Short Circuit Protection

If the secondary side synchronous rectifier is short circuited, the peak current increases rapidly after the power GaN is turned on. Therefore the protection needs to react in much less wait time. The MK2788 shortens current sense blanking time to 90ns if CS pin detects a voltage above

$V_{SR_SH}(\sim 1.2V)$ threshold. It immediately stops the current driver output. If this happens for three consecutive cycles, the MK2788 considers that a secondary SR short circuit has occurred. It stops driving, and enters the restart mode.

CS Short Protection

If CS still fails to reach $V_{CS_SH}(\sim 0.05V)$ after 5us of primary GaN opening, the MK2788 will force drive shutdown. If this condition occurs for three consecutive periods, the MK2788 enters restart mode.

Vcc Ovp

Whenever the VCC voltage is higher than the OVP threshold voltage $V_{CC_OVP}(\sim 93V)$, the output gate drive circuit will be shut down to stop the switching of the power GaN, the MK2788 enters the restart mode.

OTP

The MK2788 provides internal over-temperature protection with a trigger point of $\sim 150^{\circ}C$ and a hysteresis temperature of $\sim 30^{\circ}C$.

11. Package Information (DFN5X6)

Unit: millimeter (mm)

